

描述 / Descriptions

SOT-323 塑封封装硅 NPN 数字三极管。

Silicon NPN Digital Transistor in a SOT-323 Plastic Package.

特征 / Features



内装偏置电阻，简化线路设计，减少元件和制造流程，无卤产品。

With built-in bias resistors, simplify circuit design, reduce a quantity of parts and manufacturing process, HF Product.

用途 / Applications

用于开关、反相电路、界面电路以及驱动电路中。

Switching, Inverter circuit, Interface circuit and driver circuit applications.

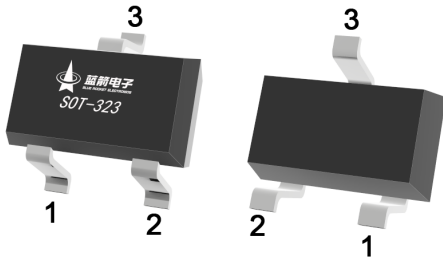内部等效电路 / Equivalent Circuit**引脚排列 / Pinning**

PIN1 : Emitter

PIN 2 : Base

PIN 3 : Collector

放大及印章代码 / h_{FE} Classifications & Marking

Marking	H24
---------	-----

极限参数 / Absolute Maximum Ratings(Ta=25°C)

参数 Parameter	符号 Symbol	数值 Rating	单位 Unit
Supply Voltage	V _{CC}	50	V
Input Voltage	V _{IN}	-10	V
		40	V
Output Current	I _{CM}	100	mA
	I _O	50	mA
Power Dissipation	P _D	200	mW
Junction Temperature	T _j	150	°C
Storage Temperature Range	T _{stg}	-55~150	°C

电性能参数 / Electrical Characteristics(Ta=25°C)

参数 Parameter	符号 Symbol	测试条件 Test Conditions	最小值 Min	典型值 Typ	最大值 Max	单位 Unit
Input Voltage	V _{I(off)}	V _{CC} =5.0V I _O =100μA	0.5			V
	V _{I(on)}	V _O =0.3V I _O =10mA			3	V
Output Voltage	V _{O(on)}	I _O =10 mA I _I =0.5mA			0.3	V
Input Current	I _I	V _I =5.0V			0.88	mA
Output Cut-off Current	I _{O(off)}	V _{CC} =50V V _I =0V			0.5	μA
DC Current Gain	G _I	V _O =5.0V I _O =5.0mA	30			
Transition Frequency	f _T	V _O =10V I _O =5.0mA f=100MHz		250		MHz
Resistance1	R ₁		7	10	13	KΩ
Resistance Ratio	R ₂ /R ₁		0.8	1	1.2	

电参数曲线图 / Electrical Characteristic Curve

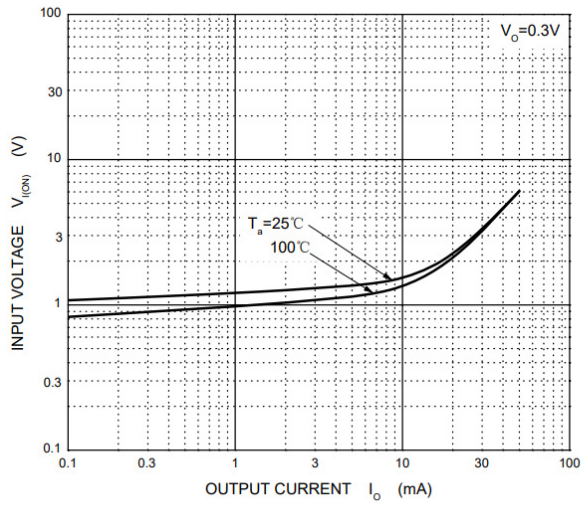


Figure 1: ON Characteristics

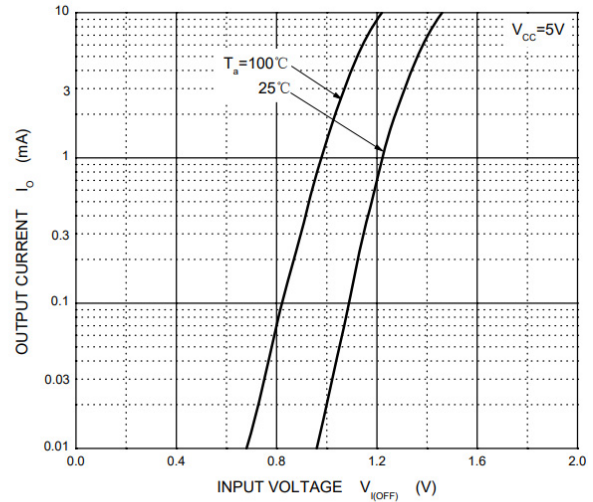


Figure 2: OFF Characteristics

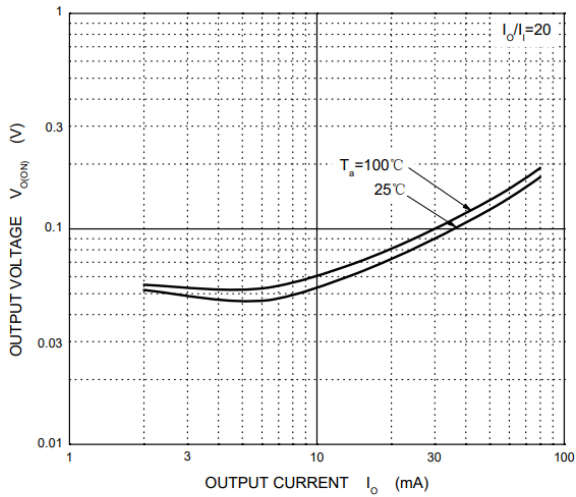


Figure 3: $V_{O(ON)}$ — I_O

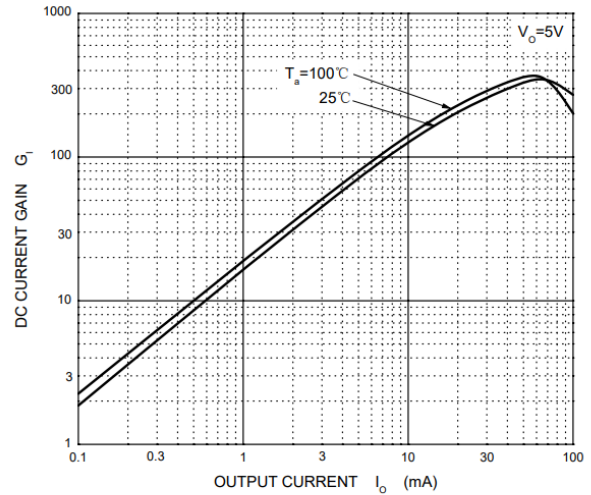


Figure 4: G_I — I_O

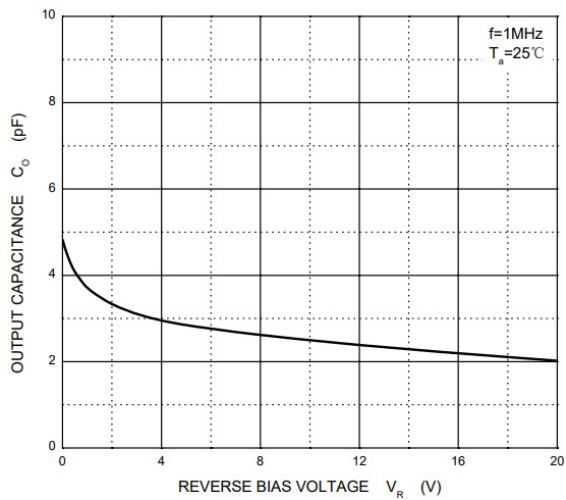


Figure 5: C_O — V_R


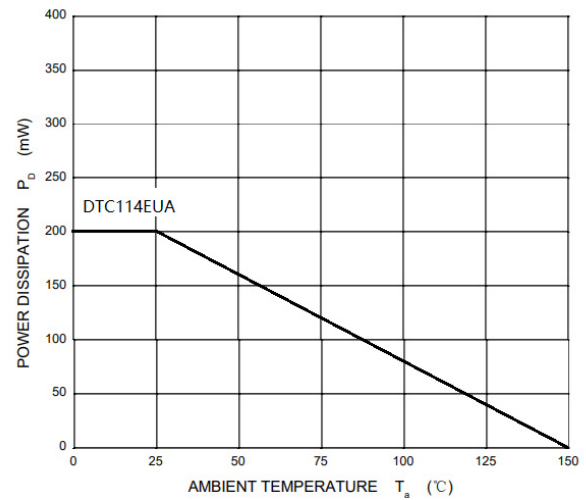


Figure 6: P_D — T_a

外形尺寸图 / Package Dimensions


SOT-323

单位：mm

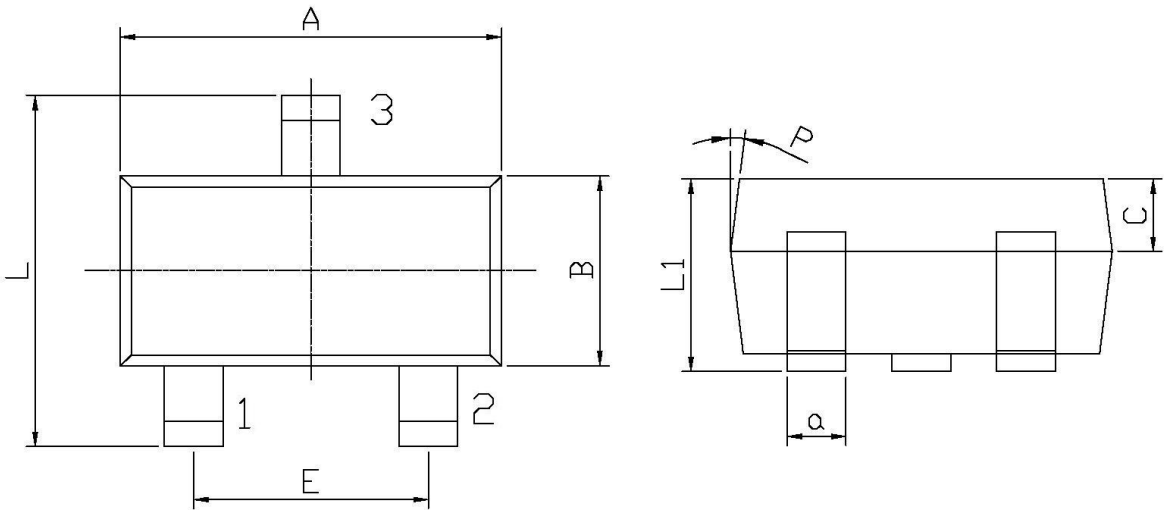

Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
A	1.95	2.35	C	0.30	0.50
L	2.00	2.2	L1	0.85	1.15
E	1.20	1.40	a	0.20	0.40
B	1.15	1.35	P	7°	

印章说明 / Marking Instructions

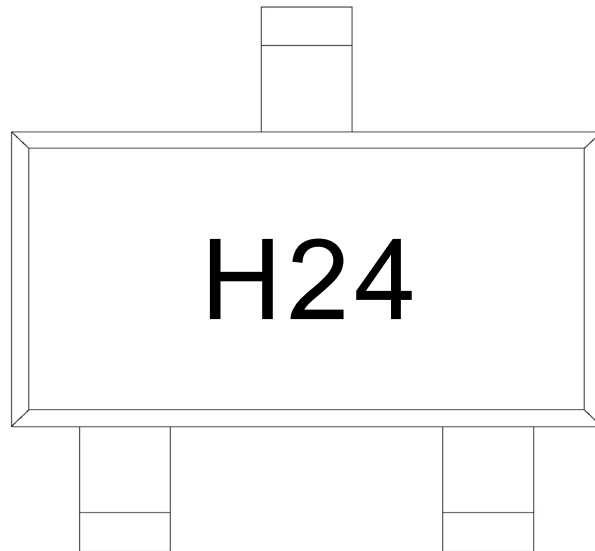

说明：

H： 为公司代码


24： 为型号代码

Note:

H： Company Code

24： Product Type Code

回流焊温度曲线图(无铅) / Temperature Profile for IR Reflow Soldering(Pb-Free)

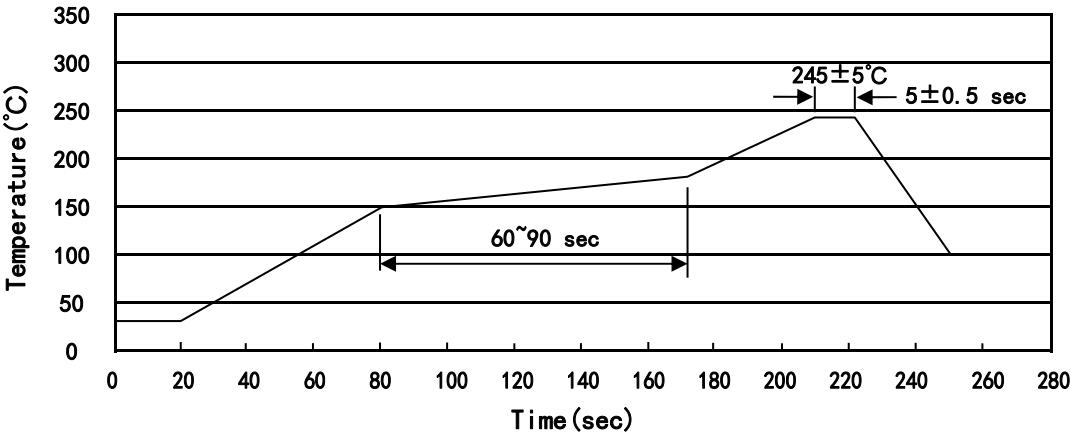

说明：

- 1、预热温度 150 ~ 180°C，时间 60 ~ 90sec;
- 2、峰值温度 245±5°C，时间持续为 5±0.5sec;
- 3、焊接制程冷却速度为 2 ~ 10°C/sec.

Note:

- 1.Preheating:150~180°C, Time:60~90sec.
- 2.Peak Temp.:245±5°C, Duration:5±0.5sec.
3. Cooling Speed: 2~10°C/sec.

耐焊接热试验条件 / Resistance to Soldering Heat Test Conditions

温度：260±5°C 时间：10±1 sec. Temp.:260±5°C Time:10±1 sec

包装规格 / Packaging SPEC.

卷盘包装 / REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOT-323	3,000	10	30,000	6	180,000	7" ×8	180×120×180	390×385×205

使用说明 / Notices